



400 MHz TETRA DUAL BANDSELECTIVE REPEATER

- **DUAL TETRA BANDS**
- **HIGH SENSITIVITY**
- **HIGH DYNAMIC RANGE**
- **COMPACT SIZE**

This repeater is intended for use in 400 MHz outdoor TETRA systems. Its uniqueness to handle two standard TETRA bands in one unit. It is a compact and reliable unit and it is especially advantageous to use it in villages, or open fields where the field strength is weak. It is a cost effective solution to cover areas, which cannot be covered economically with base stations. It is a very economical solution, can be installed easily, can be monitored and set by remote control software.

Electrical characteristics:

Frequency Band Downlink	390 – 395 MHz / 420-425 MHz *
Frequency Band Uplink	380 – 385 MHz / 410-415 MHz *
Frequency Bandwidth	5 MHz
Mode of Operation	band selective duplex
Max. ALC level	27 dBm
Linear Output Power Downlink / Uplink	+ 20 or 2x17dBm (2 carriers) @ meets with ETSI
ICP3	+ 44 dBm
Nominal Gain	70 dB
Gain Setting	70 to 40 dB in 1 dB steps
Input Noise Figure	< 6 dB typical
EVM	1 % typ. (ETSI regulation < 10%)
Harmonics	According to the ETSI regulation
Spurious Radiation	According to the ETSI regulation
Local Leakage	According to the ETSI regulation
RF Connectors	N – female
Supply Voltage	230V / 50 – 60 Hz AC
Power Consumption	95 W
Weight	20 kg
Operating temperature range	0°C to 45° (optional – 20°C to + 55 °C)
Cooling	Convection
Wired control	Local RS232
Remote Wireless Control	Dial Up GSM modem and/or automatis SMS function
Application	Indoor (or optional outdoor)
Dimension	560x302x100 mm (optional 19" rack)

Specifications are subject to change without notice.


(*) Available in any other standard TETRA bands too.



BRTD11

400 MHz TETRA DUAL BANDSELECTIVE REPEATER

Outline dimensions (mm):

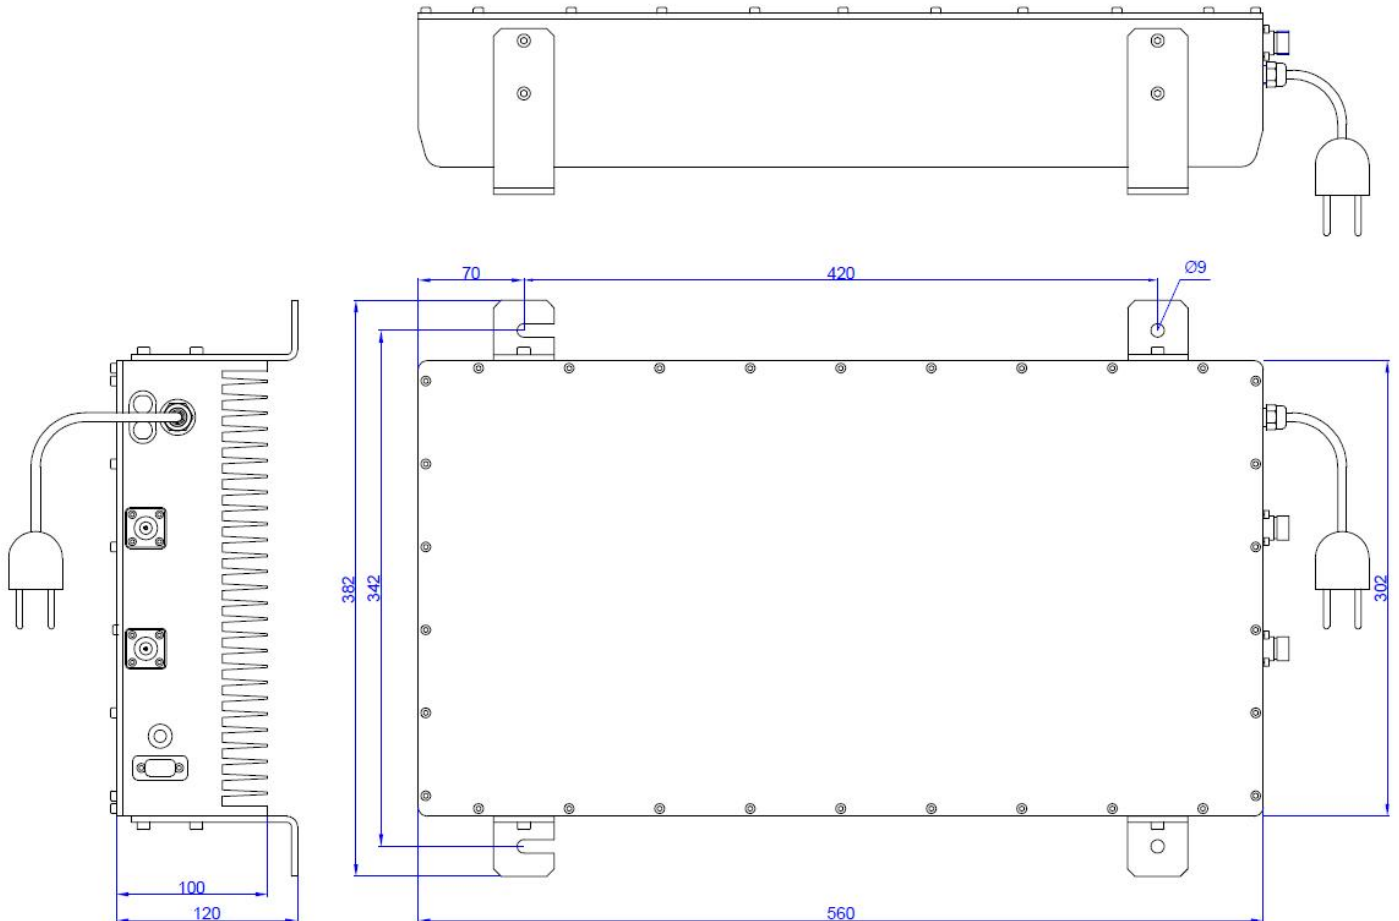



BRTD11

**400 MHz TETRA DUAL
BANDSELECTIVE REPEATER**

Picture:

